


■ Ball Bearing Hinge

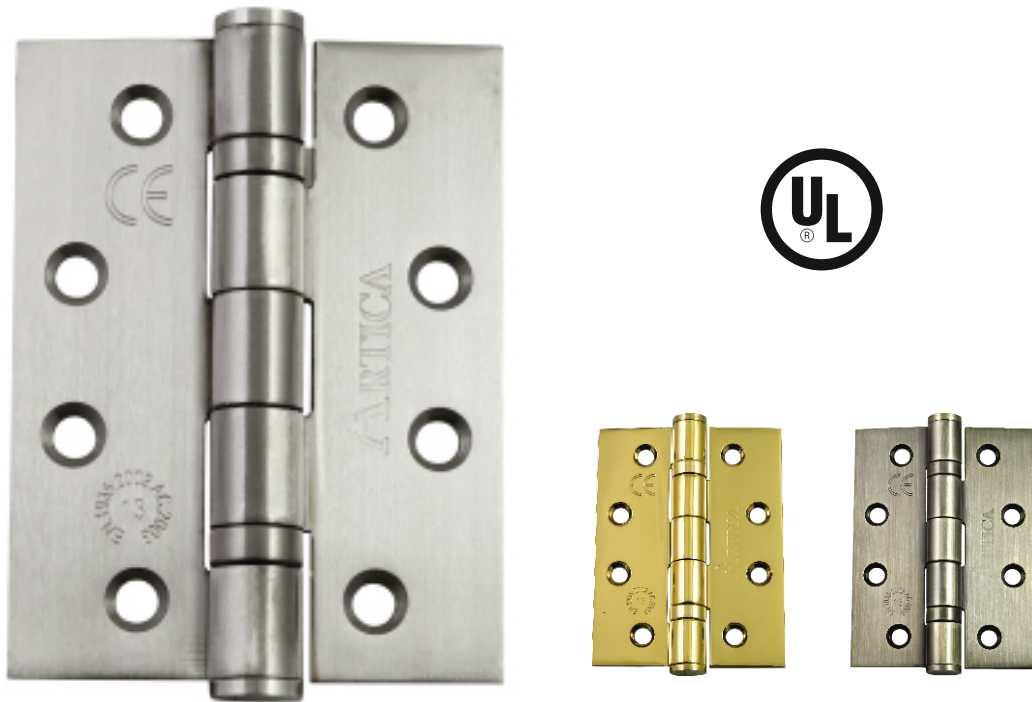

Features

- Suitable for 120 min timber and metal fire/smoke resistant door
- Double Ball Bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS En1935
- Load bearing capacity up to 120kg
- Available square or radius
- Tested to Grade 7:200,000 cycles
- Pre-cut intumescent hinge pads available

Buying options: SS Grades 202, 304, 316

Sizes Available (A x B x C)

H2B222.5	: 3" x 3" x 2.5 mm
H2B3.53.52.5	: 3.5" x 3.5" x 2.5 mm
H2B432.5	: 4" x 3" x 2.5 mm
H2B442.5	: 4" x 4" x 2.5 mm
H2B433	: 4" x 3" X 3 mm
H2B43.53	: 4" x 3.5" x 3mm
H2B443	: 4" x 4" X 3mm
H2B4.543	: 4.5" x 4" x 3mm
H2B533	: 5" x 3" x 3mm

